Module

WWW.DELOCK.COM

DATA SHEET

MiniPCIe I/O PCIe full size 1 x Gigabit Lan

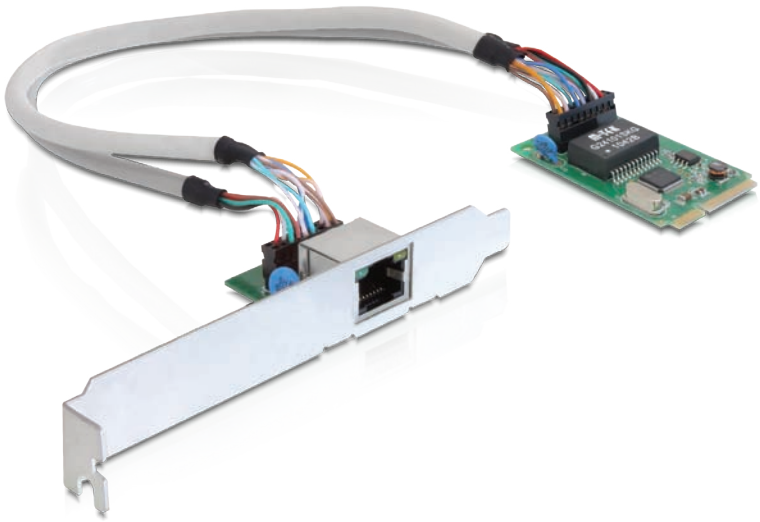

Description

This miniPCIe adapter by Delock expands your system by one Gigabit Lan interface, which you can lead out via the slot bracket.

Ref.	95228
EAN	4043619952281
Country of origin	Taiwan
Customs tariff number	84733020

Images

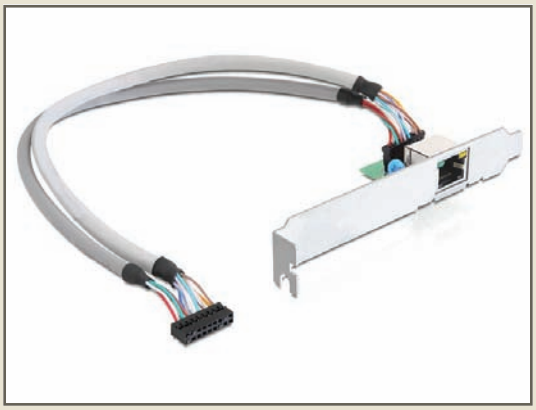

Specification

- Chipset: Jmicron JMC250B
- Form factor: miniPCIe full size
- Interface: PCI Express Revision 1.1
- Connector: 1 x Gigabit Lan
- Data transfer rate up to 10/100/1000 Mb/s
- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports Wake On Lan (WOL) and Remote Wake Up
- Automatic MDI/MDI crossover correction
- Supports IEEE 802.1P layer 2 priority encoding
- Supports IEEE 8021Q VLAN insertion and removal
- Integrated switching regulator and 3.3 V power source
- Cable length with connector: ca. 30 cm
- Operating temperature: 0 °C ~ 65 °C
- Storage temperature: -25 °C ~ 85 °C

System requirement
- Windows XP/Vista/7/7-64
- Mainboard with a free miniPCIe slot with a PCIe interface
- PC with a free PC slot

Package content
- MiniPCIe module, Connecting cable, Gigabit Lan bracket
- Driver CD, user manual

Package
- Blister

© 2011 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.